


# FEATURES:

- Designed to bring the power of UV disinfection to any space
- Pulsed Xenon technology delivers powerful, broad spectrum of UV-C, UV-B, UV-A, and violet blue light
- Provides up to 170° of disinfection and is height adjustable to help target areas of concern
- Integrated motion sensor technology designed to allow units to only operate when space is unoccupied
- Locking caster wheels allow for easy mobility, while locking unit securely in place once in position

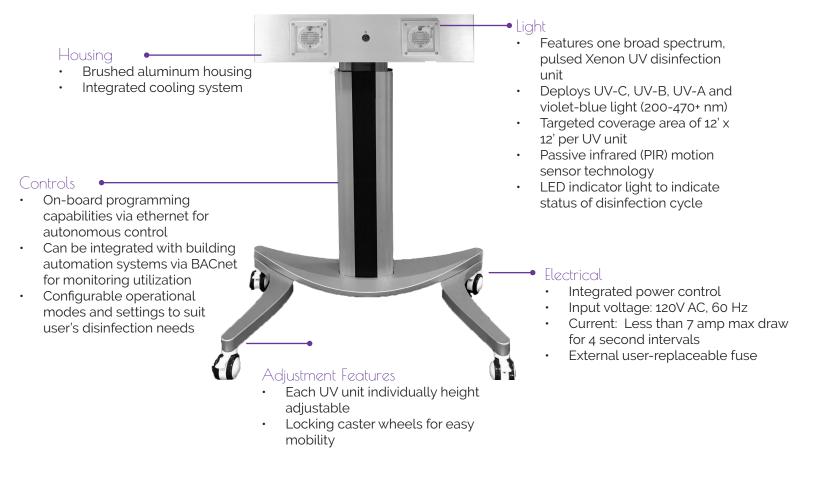

#### OPERATIONAL MODES:

Operational mode may be selected to best meet user's needs. Options include:

- Single Cycle Mode: (Most Common for Mobile Deployment) Unit will complete single disinfection cycle (15 or 30 minutes) when unit is manually activated via power switch.
- Autonomous Mode: Unit will run autonomously, activating automatically when room is unoccupied and adjusting frequency and duration of cleaning cycles based on motion detected by the sensor.
- Scheduled Mode: Unit will run pre-determined disinfection cycle(s) (15 or 30 minutes) at scheduled time(s) of day. Cycle(s) will repeat every 24 hours unless power is disrupted.

Note: Results may vary depending on distance and specific pathogens.

<sup>\*</sup>Specifications are subject to change

### PATENTS

Violet Defense's products are protected by U.S. Patent No. 8,993,988, U.S. Patent No. 9,572,902, U.S. Patent No. 10,046,075, Canadian Patent CA2891152, Australian Patent AU2013344944, and South Korea Patent 10-1596653. Additional US & international patents pending. Visit www.violetdefense.com/patents for most current list.

### LISTINGS & CERTIFICATIONS

 Certified compliant with UL 61010-1:2012 and Part 15 of FCC rules by TÜV SÜD America, a nationally recognized testing laboratory





• Independently validated to kill up to 99.9% of *E. coli, MRSA, Salmonella enterica, Norovirus, human coronavirus 229E, C. diff* and *C. auris* 

### WARRANTY

• One (1) year full replacement warranty against defects in materials and workmanship

# ORDERING INFORMATION

FAMILY	MODEL	UV Units	CONNECTION	operational mode	CONTROL
S.A.G.E. UV	Beam Unit (SUM- BEAM-2.3)	□ Standard	☐ Standard Plug (Grounded)	<ul><li>☐ Single Cycle Mode</li><li>☐ Autonomous Mode</li><li>☐ Scheduled Mode</li></ul>	<ul><li>☐ Autonomous</li><li>☐ Wireless Remote</li><li>Switch</li><li>☐ Building Automation</li></ul>