

CASING CEMENT HEADS

FEATURES

- Single or Double Plug chamber
- Low, Medium, High Pressure or Quik-Lok*
- Heavy duty retractable pin release mechanism
- 2" 15,000 PSI hammer union manifold inlets
- Replaceable bottom sub or saver nipple

QUIK-LOK

Only requires quarter-turn to engage/disengage the connection
Minimize operator error, maintenance, and downtime
Quik-Lok cap and bottom sub can be utilized as a circulating swage

CAP OPTIONS

Wrench style c/w operating handle
Top Drive cap
Quik-Lok cap

BOTTOM CONNECTIONS

Pin x Pin
Argus Quik-Connekt adapter
Argus Quik-Connekt bottom sub

MANIFOLDS


Standard lengths range from 14" to 24"[†]
Manifold system includes quarter turn low torque valves for positive & quick operation

AVAILABLE OPTIONS

Rotary Collapsible Plug Pass Tattle Tale
Wireline Plug Pass Tattle Tale
Bottom sub with API or Premium threads

**For primary cementing only.*

†Custom manifold lengths are available.

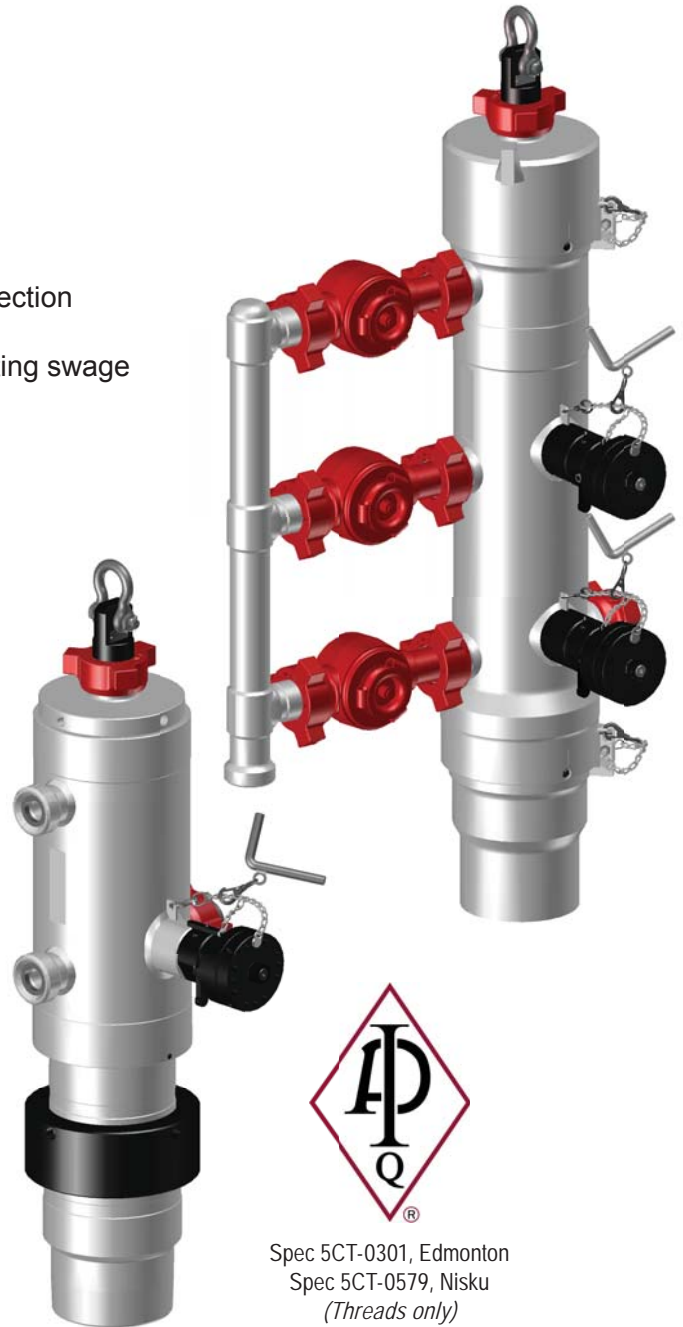


ARGUS MACHINE CO. LTD.



1.888.434.9451

argusmachine.com

GENERAL SPECIFICATIONS

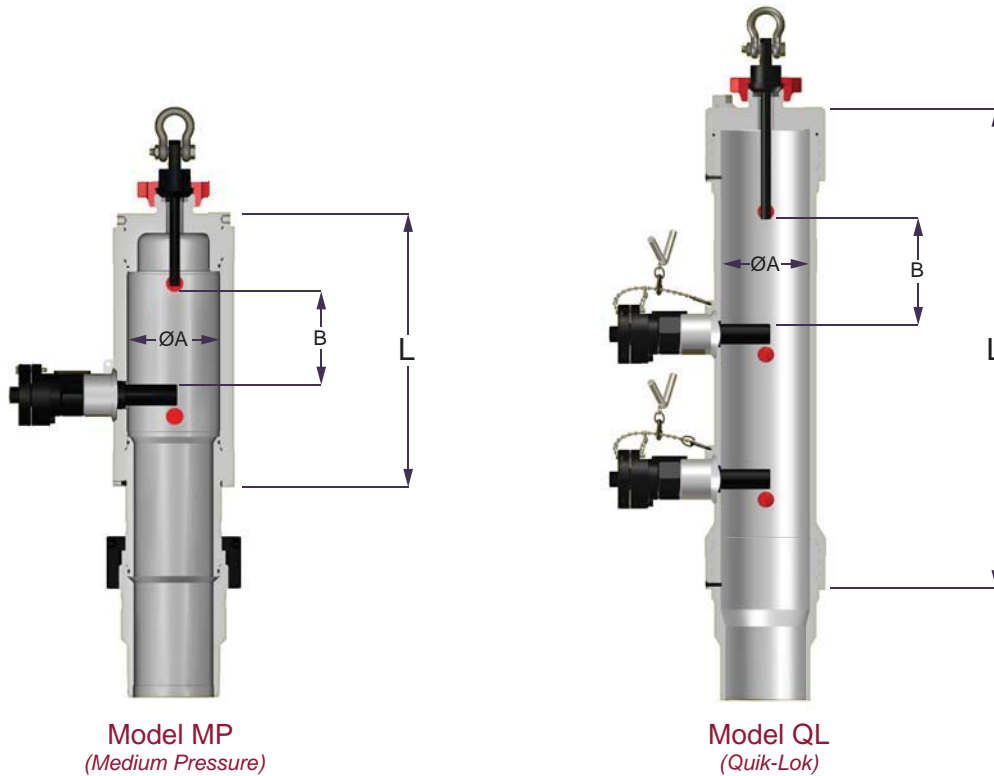

CEMENT HEAD SIZE	MODEL LP						MODEL MP						MODEL HP						MODEL QL					
	MAWP		C/C		PLUG CHAMBER		LENGTH 'L'		MAWP		C/C		PLUG CHAMBER		LENGTH 'L'		MAWP		C/C		PLUG CHAMBER		LENGTH 'L'	
	(psi)	(in)	ØA (in)	B (in)	SP (in)	DP (in)	(psi)	(in)	ØA (in)	B (in)	SP (in)	DP (in)	(psi)	(in)	ØA (in)	B (in)	SP (in)	DP (in)	(psi)	(in)	ØA (in)	B (in)	SP (in)	DP (in)
4 1/2"	7000	14	4 1/2	9 3/4	29	43	7000	14	4 1/2	9 3/4	29	43	10000	14	4 1/2	9 3/4	29	43	8500	16	4 1/2	11 3/4	37 1/2	53 1/2
5"	6400	14	5	9 3/4	29	43	7000	14	5	9 3/4	29	43	10000	14	5	9 3/4	29	43	*	16	5	11 3/4	37 1/2	53 1/2
5 1/2"	5800	14	5 1/2	9 3/4	29	43	7000	14	5 1/2	9 3/4	29	43	10000	14	5 1/2	9 3/4	29	43	6800	16	5 1/2	11 3/4	37 1/2	53 1/2
6 5/8"	5000	14	6 5/8	9 3/4	29	43	7000	14	6 5/8	9 3/4	29	43	10000	14	6 5/8	9 3/4	29	43	*	16	6 1/2	11 3/4	37 1/2	53 1/2
7"	5000	14	7	9 3/4	29	43	7000	14	7	9 3/4	29	43	10000	14	7	9 3/4	29	43	6500	16	7	11 3/4	37 1/2	53 1/2
7 5/8"	4400	14	7 5/8	9 3/4	29	43	5500	14	7 5/8	9 3/4	29	43	7500	14	7 5/8	9 3/4	29	43	*	16	7 1/2	11 3/4	37 1/2	53 1/2
8 5/8"	4400	14	8 5/8	9 3/4	29	43	5500	14	8 5/8	9 3/4	29	43	7500	14	8 5/8	9 3/4	29	43	6300	16	8 1/2	11 3/4	37 1/2	53 1/2
9 5/8"	3700	14	9 5/8	9 3/4	29	43	5500	14	9 5/8	9 3/4	29	43	7500	14	9 5/8	9 3/4	29	43	6000	16	9 1/2	11 3/4	37 1/2	53 1/2
10 3/4"	3400	18	10 3/4	13 3/4	33	51	-	-	-	-	-	-	5000	18	10 3/4	13 3/4	33	51	5000	16	10 1/2	11 3/4	37 1/2	53 1/2
11 3/4"	3100	18	11 3/4	13 3/4	33	51	-	-	-	-	-	-	5000	18	11 3/4	13 3/4	33	51	*	16	11 1/2	11 3/4	37 1/2	53 1/2
13 3/8"	3100	18	13 3/8	13 3/4	33	51	-	-	-	-	-	-	5000	18	13 3/8	13 3/4	33	51	4000	16	13 1/4	11 3/4	37 1/2	53 1/2
16"	-	-	-	-	-	-	-	-	-	-	-	-	4000	18	16	13 3/4	33	51	-	-	-	-	-	-
18 5/8"	-	-	-	-	-	-	-	-	-	-	-	-	4000	18	19 7/8	13 3/4	33	51	-	-	-	-	-	-
20"	-	-	-	-	-	-	-	-	-	-	-	-	3000	18	19 7/8	13 3/4	33	51	-	-	-	-	-	-

* Contact Argus for specifications

ARGUS GROUP OF COMPANIES
Edmonton • Calgary • Houston • Nisku